


HANDSET OPTIONS



Handset HSM
Controlbox SMART with anticollision
standby < = 0,1 W

XXXXX-E1XX-XXXXX-XX



Handset HSU with dial of height
and 4 memory positions
Controlbox SMART with anticollision
standby < = 0,1 W

XXXXX-E2XX-XXXXX-XX



Handset TOUCHbasic-DN
Controlbox SMART with anticollision
standby < = 0,1 W


XXXXX-E4XX-XXXXX-XX



Handset TOUCHfx with dial of height
and 4 memory positions
Controlbox SMART with anticollision
standby < = 0,1 W


XXXXX-E5XX-XXXXX-XX

COLOURS




grey metallic
RAL 9006 / 60G

XXXXX-XXXX-XXXXX-01



white
RAL 9016 / 60G

XXXXX-XXXX-XXXXX-03



black
RAL 9005 / 60G

XXXXX-XXXX-XXXXX-02

HON *move*®

HEIGHT ADJUSTABLE FRAMES



4 - LEG
2 - SEGMENT

HON *move*®

Height adjustable frame

4 - LEG

2 - segment

TECHNICAL SPECIFICATION:

Selectable width W (without desktop): **1180 - 1980 mm (by 200 mm)**

Adjustable height H (without desktop): **680 - 1180 mm**

Depth D (without desktop): **780 mm**

Profile tube: **60 x 60 / 50 x 50 mm**



Maximum load capacity (desktop included): **80 kg**

Time load capacity: **10 % , max. 2 min. / 18 min.**

Lifting time: **30 mm / s**

Warranty: **3 years**

412C0-EXXX-00000-XX

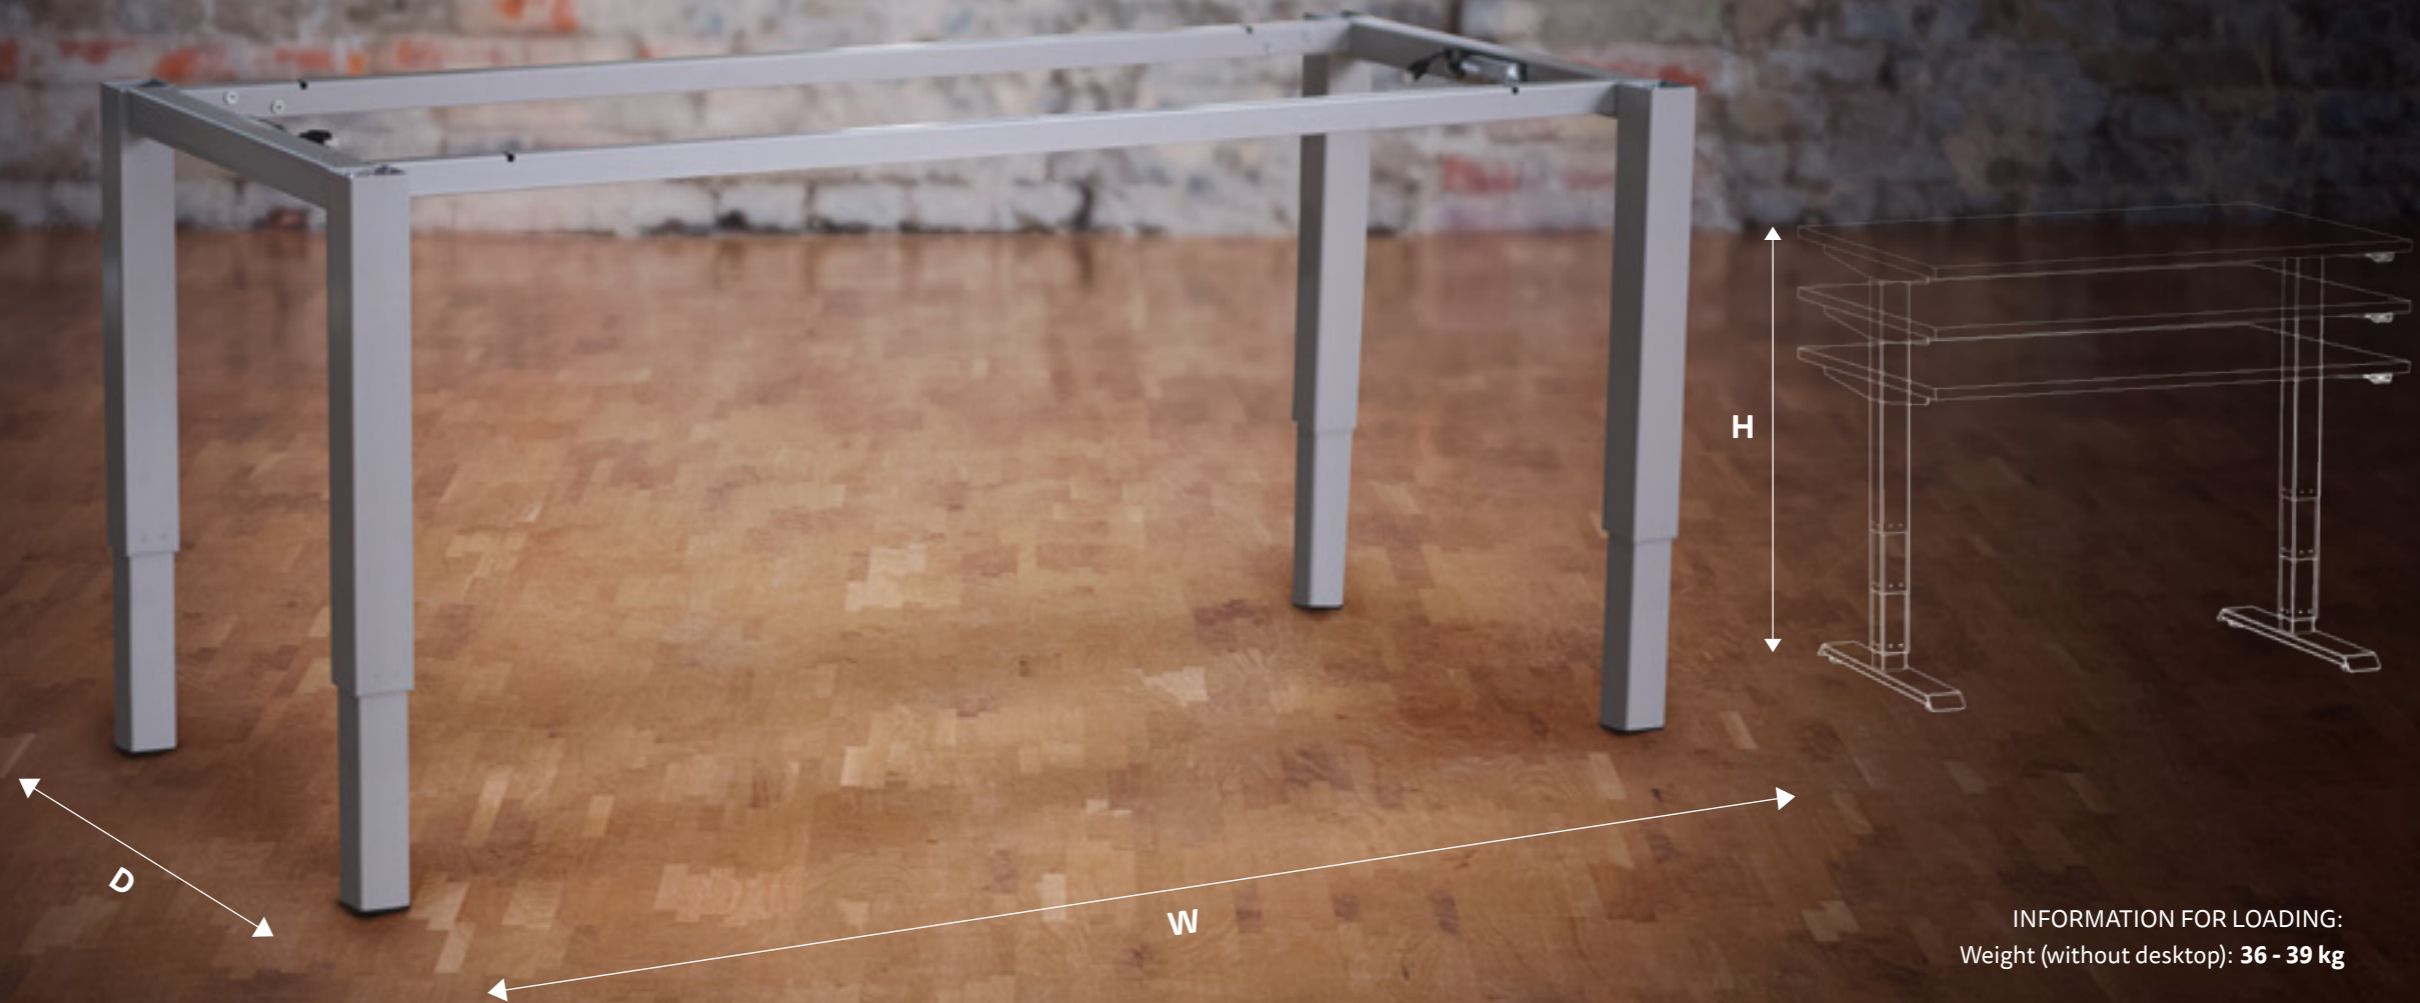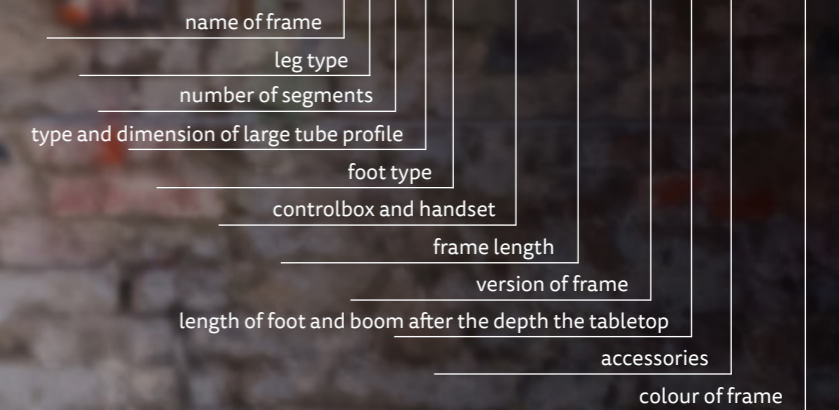

INFORMATION FOR LOADING:
Weight (without desktop): **36 - 39 kg**